



830nm 30mw SM Butterfly (BTF) Package Pigtailed Laser Diode with SMF | Built-in TEC cooler
830nm SM Fiber Coupled LD with 14-Pin package | Infrared Laser Diode
WSLX-830-030m-4-T-PD
Wavespectrum Laser Group
www.wavespectrum-laser.com

830nm Pigtailed Diode Laser		30mW/SM Fiber		Wavespectrum Laser Group	
PARAMETER	SYMBOL	VALUE	UNIT		
Reverse Voltage	V_r	2.0		V	
Operating Temperature	T_{op}	-20~+50		°C	
Storage Temperature	T_{stg}	-40~+80		°C	
Lead soldering temperature (5 sec.)	T_{is}	250		°C	
Features: <ul style="list-style-type: none"> ● 830nm ● With SM Fiber ● 14-Pin Package ● Built-in TEC Cooler 					
Applications: <ul style="list-style-type: none"> ● Medical laser treatment ● Sensor ● Others 					
Specifications		WSLX-830-030m-4-T-PD			
		Min	Type	Max	
Center Wavelength@25°C		±3nm	830nm	±10nm	
Recommend Operating Temperature		25°C			
Output Power		----	30mw	----	
Fiber Type		Single Mode Fiber			
Fiber Core		5um			
Threshold Current (Typ.)		----	40mA	60mA	
Operating Current (Typ.)		----	200mA	230mA	
Operating Voltage		----	2.0V	2.3V	
TEC Max Current		1.8A			
TEC Max Voltage		2.5V			
Thermistor		10K			
Fiber Connector		FC/SMA905			
Fiber Length		80cm			
Package Style		14-Pin			

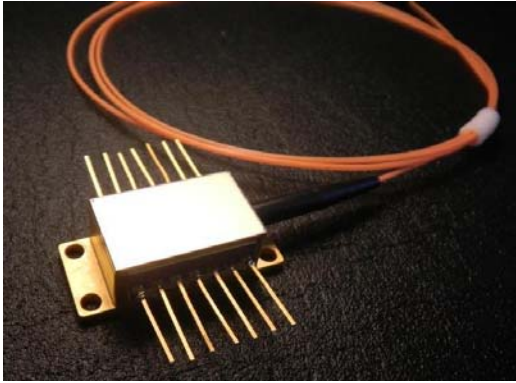

14-Pin Package View

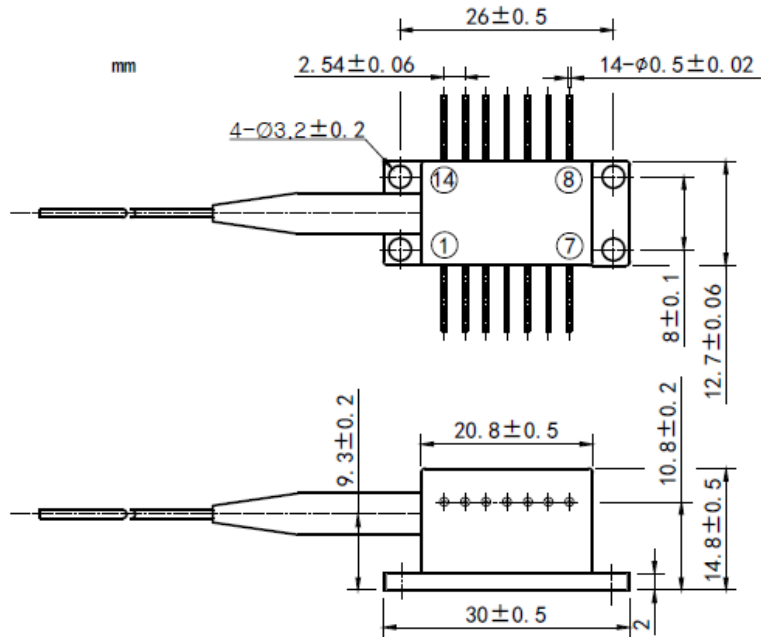

Pin Out:

PIN	FUNCTION	PIN	FUNCTION
1	TEC(+)	14	TEC(-)
2	THERMISTOR	13	CASE
3	PD(+)	12	NC
4	PD(-)	11	LD(-)
5	THERMISTOR	10	LD(+)
6	NC	9	NC
7	NC	8	NC

Electrically shorten LD module and store in non-extreme conditions.
Suggest using the constant current power supply.



Wavespectrum Laser Group
www.wavespectrum-laser.com
sales@wavespectrum-laser.com

