




850nm 15mw~20mw SM Butterfly (BTF) Package Pigtailed Laser Diode with SMF | Built-in TEC cooler

850nm SM Fiber Coupled LD with 14-Pin package | Infrared Laser Diode

WSLX-850-020m-4-T-PD

Wavespectrum Laser Group


www.wavespectrum-laser.com

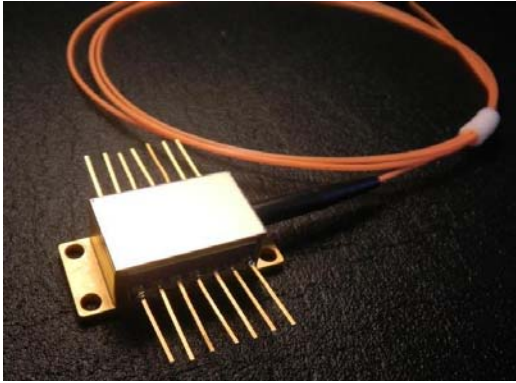850nm Pigtailed Diode Laser		20mW/SM Fiber		Wavespectrum Laser Group	
PARAMETER	SYMBOL	VALUE	UNIT		
Reverse Voltage	$V_r$	2.0	V		
Operating Temperature	$T_{op}$	-10~+45	°C		
Storage Temperature	$T_{stg}$	-40~+80	°C		
Lead soldering temperature (5 sec.)	$T_{is}$	250	°C		
<b>Features:</b> <ul style="list-style-type: none"> <li>850nm</li> <li>With SM Fiber</li> <li>14-Pin Package</li> <li>Built-in TEC Cooler</li> </ul>					
<b>Applications:</b> <ul style="list-style-type: none"> <li>Medical laser treatment</li> <li>Sensor</li> <li>Others</li> </ul>					
<b>Specifications</b>		<b>WSLX-850-020m-4-T-PD</b>			
	Min	Type	Max		
Center Wavelength@25°C	840nm	850nm	860nm		
Recommend Operating Temperature	25°C				
Output Power	15mw	20mw	----		
Fiber Type	Single Mode Fiber				
Fiber Core	5um				
Threshold Current (Typ.)	----	20mA	30mA		
Operating Current (Typ.)	----	120mA	140mA		
Operating Voltage	----	2.5V	3.0V		
TEC Max Current	1.8A				
TEC Max Voltage	2.5V				
Thermistor	10K				
Fiber Connector	FC/SMA905				
Fiber Length	80cm				
Package Style	14-Pin				

Wavespectrum Laser Group  
www.wavespectrum-laser.com  
sales@wavespectrum-laser.com



### 14-Pin Package View

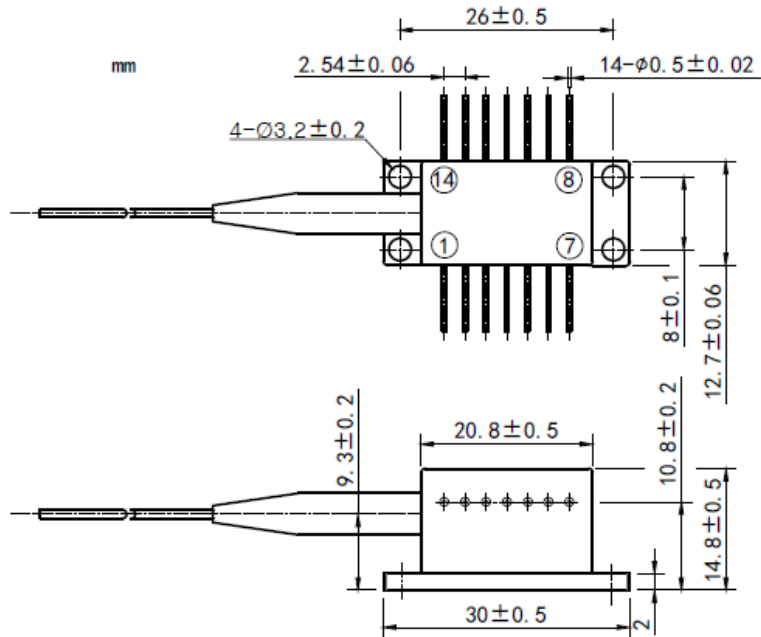

### Pin Out:

PIN	FUNCTION	PIN	FUNCTION
1	TEC(+)	14	TEC(-)
2	THERMISTOR	13	CASE
3	PD(+)	12	NC
4	PD(-)	11	LD(-)
5	THERMISTOR	10	LD(+)
6	NC	9	NC
7	NC	8	NC

Electrically shorten LD module and store in non-extreme conditions.  
Suggest using the constant current power supply.



Wavespectrum Laser Group  
www.wavespectrum-laser.com  
sales@wavespectrum-laser.com

