


1064nm 10mw SM Butterfly (BTF) Package Pigtailed Laser Diode with SMF | Built-in TEC cooler

1060nm~1064nm 10mw Single Mode Fiber Coupled LD with 14-Pin package | Infrared Laser Diode

WSLX-1064-010m-4-T-PD


Wavespectrum Laser Group

www.wavespectrum-laser.com

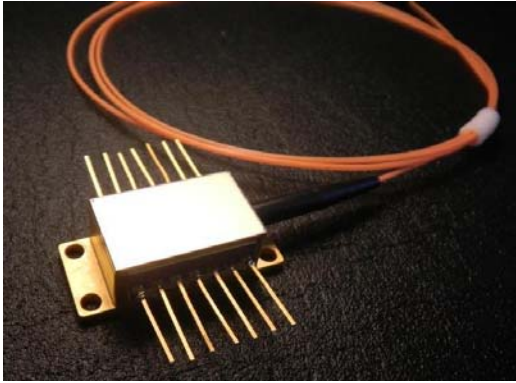1064nm Pigtailed Diode Laser		10mW/SM Fiber		Wavespectrum Laser Group	
PARAMETER	SYMBOL	VALUE	UNIT		
Reverse Voltage	$V_r$	2.0	V		
Operating Temperature	$T_{op}$	-10~+50	°C		
Storage Temperature	$T_{stg}$	-40~+80	°C		
Lead soldering temperature (5 sec.)	$T_{is}$	250	°C		
<b>Features:</b> <ul style="list-style-type: none"> <li>1064nm</li> <li>With SM Fiber</li> <li>14-Pin Package</li> <li>Built-in TEC Cooler</li> </ul>					
<b>Applications:</b> <ul style="list-style-type: none"> <li>Medical laser treatment</li> <li>Sensor</li> <li>Others</li> </ul>					
<b>Specifications</b>		<b>WSLX-1064-010m-4-T-PD</b>			
	Min	Type	Max		
Center Wavelength@25°C	±3nm	1064nm	±10nm		
Recommend Operating Temperature	25°C				
Output Power	----	10mw	----		
Fiber Type	Single Mode Fiber				
Fiber Core	6um				
Threshold Current (Typ.)	----	25mA	40mA		
Operating Current (Typ.)	----	100mA	120mA		
Operating Voltage	----	1.5V	2.0V		
TEC Max Current	1.8A				
TEC Max Voltage	2.5V				
Thermistor	10K				
Fiber Connector	FC/SMA905				
Fiber Length	80cm				
Package Style	14-Pin				



### 14-Pin Package View

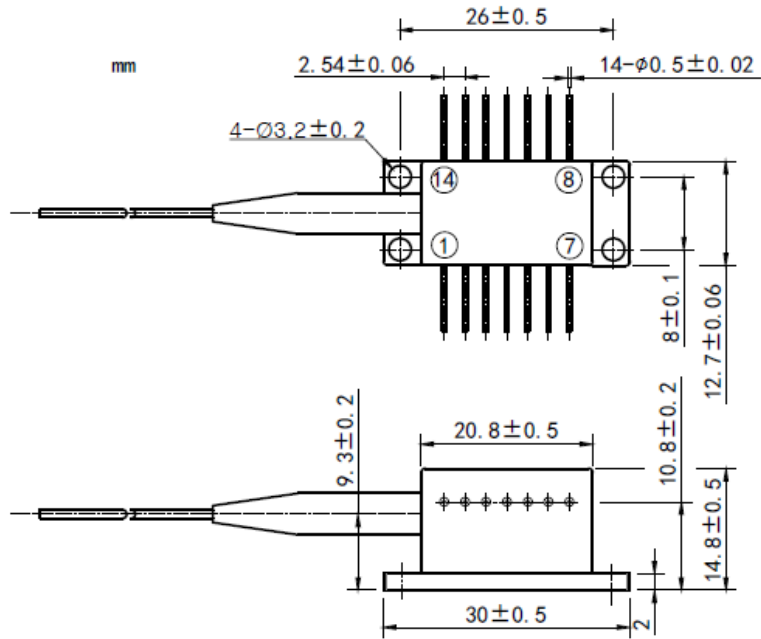

### Pin Out:

PIN	FUNCTION	PIN	FUNCTION
1	TEC(+)	14	TEC(-)
2	THERMISTOR	13	CASE
3	PD(+)	12	NC
4	PD(-)	11	LD(-)
5	THERMISTOR	10	LD(+)
6	NC	9	NC
7	NC	8	NC

Electrically shorten LD module and store in non-extreme conditions.  
Suggest using the constant current power supply.



Wavespectrum Laser Group  
[www.wavespectrum-laser.com](http://www.wavespectrum-laser.com)  
[sales@wavespectrum-laser.com](mailto:sales@wavespectrum-laser.com)

