

**808nm~810nm 8W Fiber Coupled Laser Diode with 9-PIN HHL Package**
**808nm 8W|9-Pin HHL Package |TEC Cooling | 400um Fiber Core| High Power LD For Medical Care**
**WSLX-808-008-H-T**
**Wavespectrum Laser Group**
**www.wavespectrum-laser.com**

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	$V_r$	2.0	V
Operating Temperature	$T_{op}$	+10 ~ +30	°C
Storage Temperature	$T_{stg}$	-20 ~ +80	°C
Lead soldering temperature (10 sec.)	$T_{is}$	260	°C

**Features:**

- 808nm
- 9-pin HHL Package
- Built-in TEC Cooling
- Built-in PD Optional

**Applications:**


- Medical Laser Treatment
- Pumping
- Others


**Specifications**
**WSLX-808-008-H-T**

	Min	Type	Max
Center Wavelength@25°C	±3nm	808nm	±10nm
Spectral Width (FWHM)		3nm	
Output Power	----	8W	---
Temperature Coefficient of Wavelength		0.3nm / °C	
Threshold Current (Typ.)		1.5A	
Operating Current (Typ.)		12A	
Operating Voltage		2.0V	
Recommended Case Temperature		25°C	
TEC Max. Current		6A	
TEC Max. Voltage		9.8V	
Fiber Core Diameter		400um	
N.A.		0.22	
Package		9-PIN HHL	
Fiber Length		80cm	
Connector Type		FC (SMA905 Optional)	



## 9-PIN HHL Package View

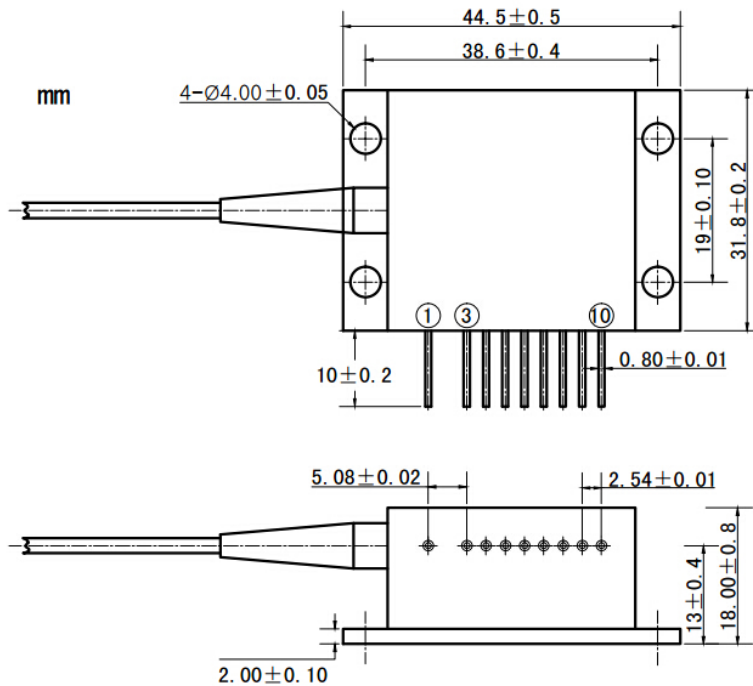

PIN	FUNCTION
1	TEC (-)
2	-
3	CASE
4	LD (+)
5	THERM
6	THERM
7	LD (-)
8	PD (N)
9	PD (P)
10	TEC (+)

Wavespectrum offer **Customized 808nm Fiber Coupled LD.**

- Customized Output Power
- Customized Fiber Core
- Dual-Wavelength or Tri-Wavelength Module Optional  
(such as 10w@808nm+350w@635nm)

Contact us with [info@wavespectrum-laser.com](mailto:info@wavespectrum-laser.com)

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.



Wavespectrum Laser Group  
[www.wavespectrum-laser.com](http://www.wavespectrum-laser.com)  
[sales@wavespectrum-laser.com](mailto:sales@wavespectrum-laser.com)

