




915nm 1W Fiber Coupled Laser Diode with Butterfly (BTF) Package | Built-in TEC cooler | With Photodiode  
915nm 1W Pigtailed Diode Laser Module With 14-Pin Butterfly Package | Infrared LD Module  
WSLX-915-001-H-T-PD      Wavespectrum Laser Group      www.wavespectrum-laser.com

915nm Pigtailed Diode Laser	1W/MM Fiber	en.wavespectrum-laser.com.cn
-----------------------------	-------------	------------------------------

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	$V_r$	2.0	V
Operating Temperature	$T_{op}$	+10~+30	°C
Storage Temperature	$T_{stg}$	-20~+80	°C
Lead soldering temperature (5 sec.)	$T_{is}$	250	°C

**Features:**

- 915nm
- 14-Pin Butterfly Package
- Built-in TEC Cooler
- Built-in Photodiode

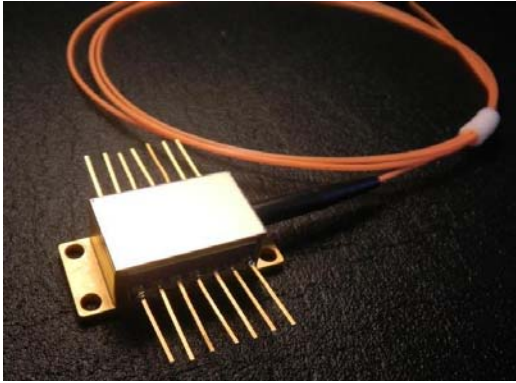

**Applications:**


- Medical Laser Treatment
- Sensor
- Others

Specifications	WSLX-915-001-H-T-PD		
----------------	---------------------	--	--

	Min	Type	Max
Center Wavelength@25°C	±3nm	915nm	±10nm
Output Power		1W	
Spectral Width (FWHM)		2nm	
Recommend Operating Temperature		25°C	
Temperature Coefficient of Wavelength		0.3nm / °C	
Threshold Current (Typ.)		0.4A	
Operating Current (Typ.)		1.5A	
Operating Voltage		1.7V	
TEC Max Current		1.8A	
TEC Max Voltage		2.5V	
Thermistor		10K	
Fiber Core		105um	
N.A.		0.22	
Fiber Connector		FC/SMA905	
Fiber Length		80cm	
Package Style		14-Pin	



### 14-Pin Package View

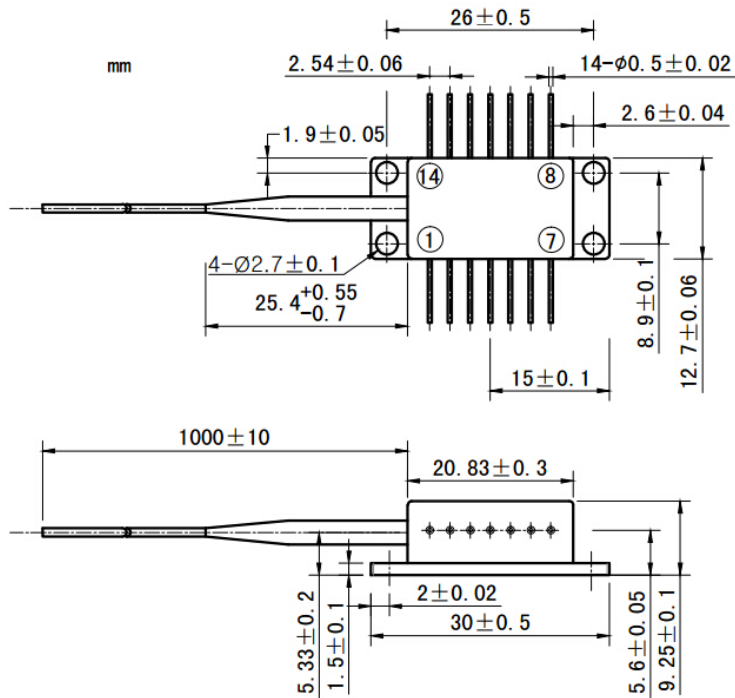

### Pin Out:

PIN	FUNCTION	PIN	FUNCTION
1	TEC(+)	14	TEC(-)
2	NC	13	NC
3	NC	12	NC
4	LD(+)	11	LD(-)
5	NC	10	Thermistor
6	PD(+)	9	Thermistor
7	PD(-)	8	NC

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

