


**405nm 50mW High Power PM Pigtailed Laser Diode Module With Polarization maintaining Fiber**  
**405nm~410nm 50mW PM Fiber Coupled Diode Laser Module | Violet LD Module With PMF**  
**WSLP-405-050m-PM      Wavespectrum Laser Group      www.wavespectrum-laser.com**

<b>405nm Pigtailed Diode Laser</b>	<b>50mW/PMF</b>	<b>en.wavespectrum-laser.com.cn</b>
------------------------------------	-----------------	-------------------------------------




PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	$V_r$	2.0	V
Operating Temperature	$T_{op}$	-10~+70	°C
Storage Temperature	$T_{stg}$	-40~+85	°C
Lead soldering temperature (10 sec.)	$T_{is}$	260	°C

<b>Features:</b> <ul style="list-style-type: none"> <li><span style="color: yellow;">●</span> 405nm</li> <li><span style="color: yellow;">●</span> PM Fiber</li> <li><span style="color: yellow;">●</span> High Reliability</li> <li><span style="color: yellow;">●</span> High Polarization Extinction Ratio</li> </ul>	
<b>Applications:</b> <ul style="list-style-type: none"> <li><span style="color: yellow;">●</span> Medical Laser Treatment</li> <li><span style="color: yellow;">●</span> Biotechnology</li> <li><span style="color: yellow;">●</span> Others</li> </ul>	

Specifications	WSLP-405-050m-PM		
	Min	Type	Max
Center Wavelength@25°C	±5nm	405nm	±10nm
Spectral Width (FWHM)	----	2.0nm	----
Output Power	----	50mW	----
Fiber Type	UV Polarization Maintaining Fiber		
Fiber Core	3um		
Recommend Operating Temperature	25°C		
Polarization Extinction Ratio	13dB	15dB	----
Fiber Connector	FC/APC		
Fiber Length	----	80cm	100cm
Threshold Current	----	35mA	60mA
Operating Current	----	160mA	180mA
Operating Voltage	----	5.2V	6.0V
Package Style	Coaxial or B82		

High Polarization Extinction Ratio (PER) Version Laser Module is also available, please contact us.

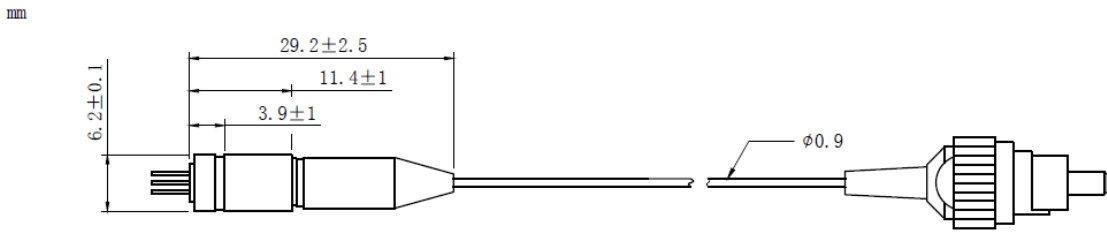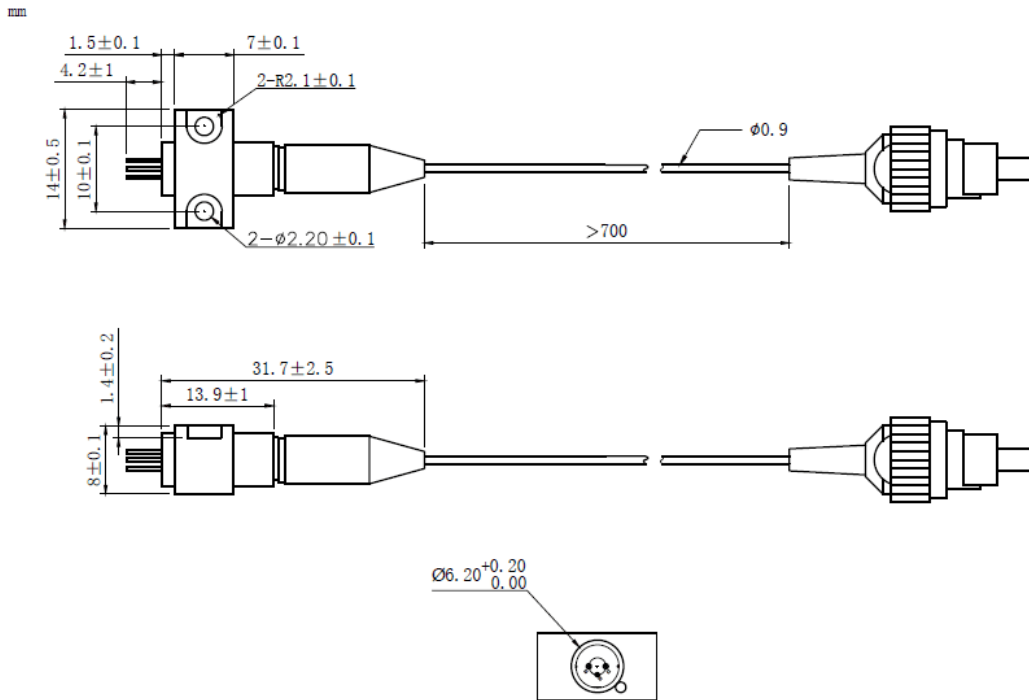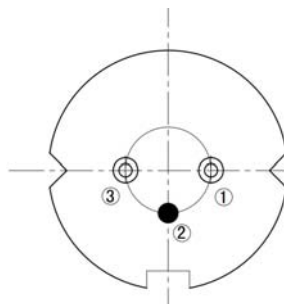

**Coaxial Package View: (Part Number: WSLP-405-050m-PM)**

**B82 Package View: (Part Number: WSLP-405-050m-PM-B)**

**PIN Bottom View:**


<b>1</b>	<b>LD(+)</b>
<b>2</b>	<b>GND</b>
<b>3</b>	<b>LD(-)</b>



Electrically shorten LD module and store in non-extreme conditions.  
Suggest using the constant current power supply.

