


**635nm~638nm 10mW Single Mode Fiber Coupled Diode Laser with Photodiode (PD)**
**635nm 10mW Coaxial Pigtailed Laser Diode with 4um Single Mode Fiber (SM Fiber)**

WSLP-635-010m-4-PD

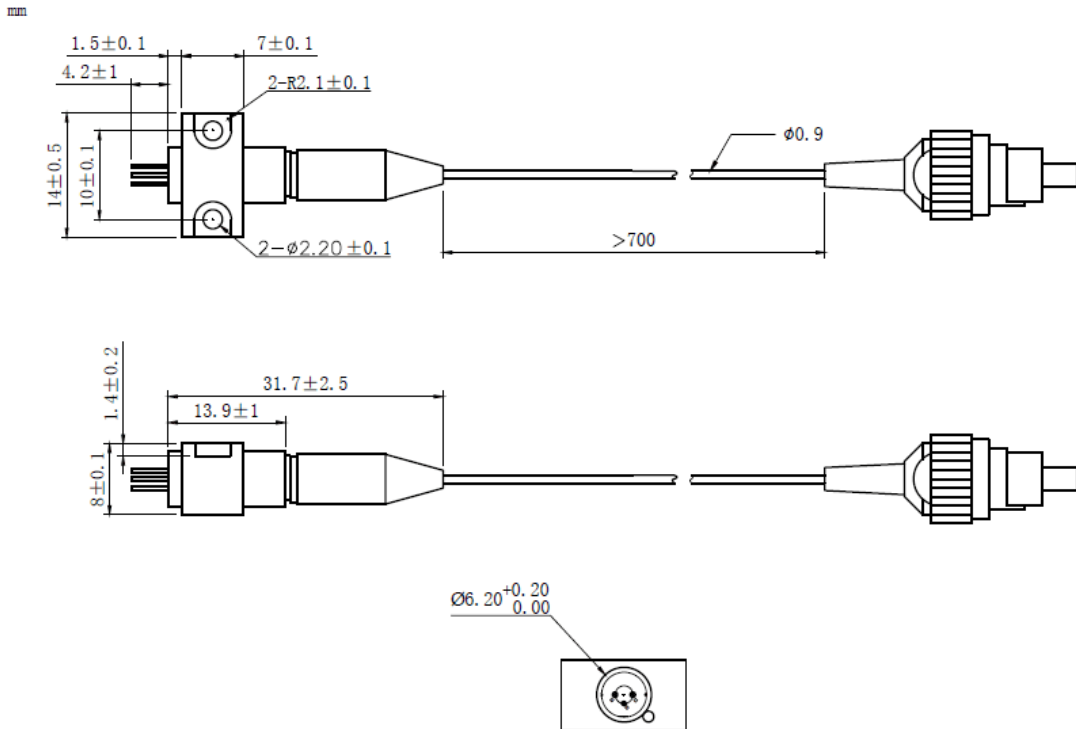
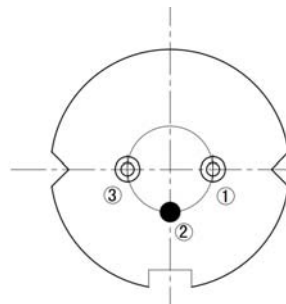
Wavespectrum Laser Group

[www.wavespectrum-laser.com](http://www.wavespectrum-laser.com)
[en.wavespectrum-laser.com.cn](http://en.wavespectrum-laser.com.cn)
**635nm Pigtailed Diode Laser 10mw/SMF**

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	$V_r$	2.0	V
Operating Temperature	$T_{op}$	-10~+50	°C
Storage Temperature	$T_{stg}$	-40~+85	°C
Lead soldering temperature (10 sec.)	$T_{is}$	260	°C
<b>Features:</b> <ul style="list-style-type: none"> <li>● 635nm</li> <li>● 4um SM Fiber</li> <li>● Coaxial or B82 Package</li> <li>● Built-in PD</li> </ul>			
<b>Applications:</b> <ul style="list-style-type: none"> <li>● Medical Laser Treatment</li> <li>● Aiming Beam</li> <li>● Others</li> </ul>			
<b>Specifications</b>	<b>WSLP-635-010m-4-PD</b>		
	Min	Type	Max
Center Wavelength@25°C	630nm	638nm	645nm
Recommended work Temperature	25°C		
Output Power	----	10mW	----
Fiber Type	Single Mode Fiber		
Fiber Core	4um		
Monitor Current	----	0.3mA	----
PD Reverse Voltage	----	----	30V
Fiber Connector	FC/SC/SMA905		
Fiber Length	----	80cm	100cm
Threshold Current	----	40mA	65mA
Operating Current	----	90mA	110mA
Operating Voltage	----	2.4V	2.8V
Package Style	Coaxial or B82		
PD	Built-in		



**Coaxial Package View: (Part Number: WSLP-635-010m-4-PD)**

**B82 Package View: (Part Number: WSLP-635-010m-4-B-PD)**

**PIN Bottom View:**


1	LD(-)
2	LD(+) & PD(-)
3	PD(+)



Electrically shorten LD module and store in non-extreme conditions.  
Suggest using the constant current power supply.

