
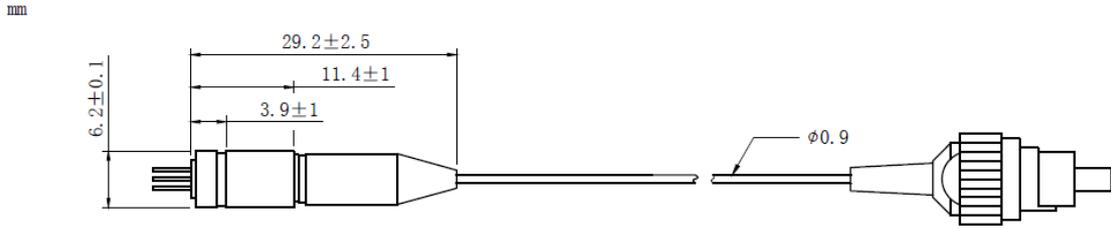

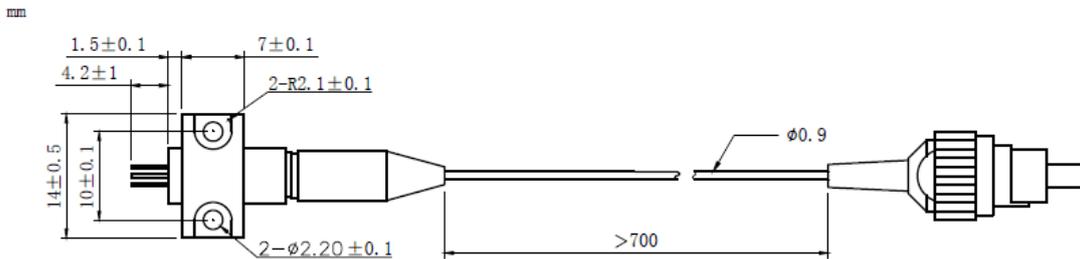


**785nm 30mW PM Fiber Coupled Laser Diode with Coaxial Package | Infrared Laser Diode
 780nm~785nm 30mW Coaxial Pigtailed LD with Polarization Maintaining Fiber (SM Fiber)**
WSLP-785-030m-PM-PD
Wavespectrum Laser Group
www.wavespectrum-laser.com

785nm Pigtailed Diode Laser		30mW/PM Fiber		en.wavespectrum-laser.com.cn	
PARAMETER	SYMBOL	VALUE	UNIT		
Reverse Voltage	V_r	2.0		V	
Operating Temperature	T_{op}	-10~+60		°C	
Storage Temperature	T_{stg}	-40~+85		°C	
Lead soldering temperature (10 sec.)	T_{is}	260		°C	
Features: <ul style="list-style-type: none"> ● 785nm ● PM Fiber ● High Reliability ● High Polarization Extinction Ratio 					
Applications: <ul style="list-style-type: none"> ● Biological Instruments ● Analytical Equipment ● Others 					
Specifications	WSLP-785-030m-PM-PD				
	Min	Type	Max		
Center Wavelength@25°C	±5nm	785nm	±10nm		
Recommended work Temperature	25°C				
Output Power	----	30mW	----		
Fiber Type	Polarization Maintaining Fiber				
Fiber Core	5um				
Polarization Extinction Ratio	13dB	15dB	----		
Monitor Current	----	0.3mA	----		
Fiber Connector	FC/APC				
Fiber Length	----	80cm	100cm		
Threshold Current (Typ.)	----	35mA	60mA		
Operating Current (Typ.)	----	125mA	140mA		
Operating Voltage	----	2.3V	2.7V		
Package Style	Coaxial or B82				
High Polarization Extinction Ratio (PER) Version Laser Module is also available, please contact us.					



Coaxial Package View: (Part Number: WSLP-785-030m-PM-PD)

B82 Package View: (Part Number: WSLP-785-030m-PM-B-PD)

PIN Bottom View:


1	LD(-)
2	LD(+)&PD(-)
3	PD(+)



Electrically shorten LD module and store in non-extreme conditions.
Suggest using the constant current power supply.

