
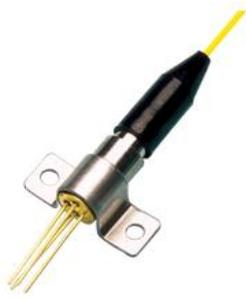
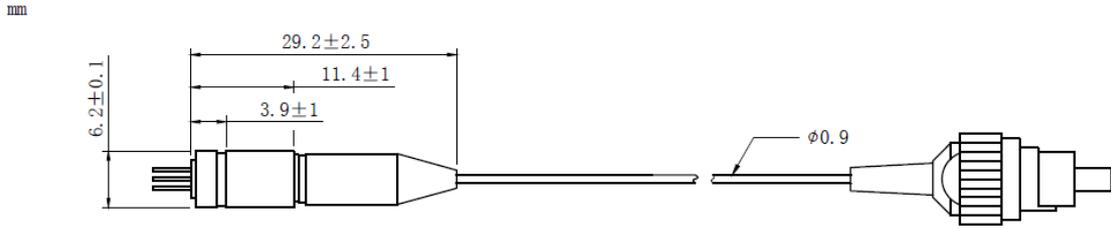

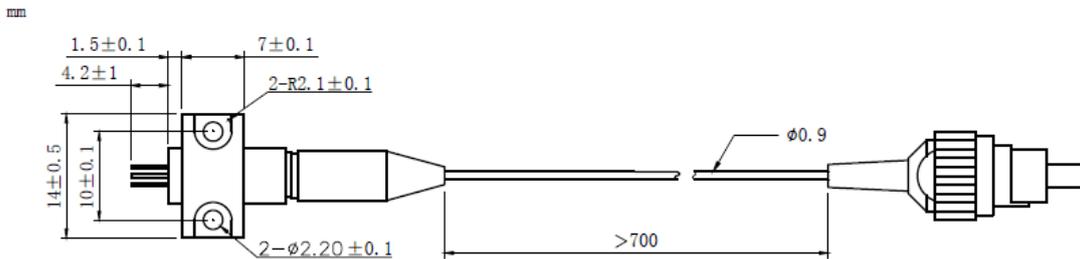


**940nm~950nm 100mW SM Coaxial Pigtailed Laser Diode with Single Mode Fiber**
**940nm | 100mW | High Power Single Mode Fiber Coupled Diode Laser Module | Built-in PD | SMF LD Module**
**WSLP-940-100m-4-PD**
**Wavespectrum Laser Group**
**www.wavespectrum-laser.com**

940nm Pigtailed Diode Laser		100mW/SMF		en.wavespectrum-laser.com.cn	
PARAMETER	SYMBOL	VALUE		UNIT	
Reverse Voltage	$V_r$	2.0		V	
Operating Temperature	$T_{op}$	-10~+60		°C	
Storage Temperature	$T_{stg}$	-40~+85		°C	
Lead soldering temperature (10 sec.)	$T_{is}$	260		°C	
<b>Features:</b> <ul style="list-style-type: none"> <li>940nm</li> <li>Single Mode Fiber</li> <li>Coaxial or B82 Package</li> <li>Built-in PD</li> </ul>					
<b>Applications:</b> <ul style="list-style-type: none"> <li>Medical Laser Treatment</li> <li>Sensor</li> <li>Others</li> </ul>					
<b>Specifications</b>		<b>WSLP-940-100m-4-PD</b>			
		Min	Type	Max	
Center Wavelength@25°C		±5nm	940nm	±15nm	
Recommended Operating Temperature		25°C			
Output Power		----	100mW	----	
Fiber Type		Single Mode Fiber			
Fiber Core		5um			
Monitor Current		----	0.3mA	----	
PD Reverse Voltage		----	----	30V	
Fiber Connector		FC/SC/SMA905			
Fiber Length		----	80cm	100cm	
Threshold Current (Typ.)		----	25mA	55mA	
Operating Current (Typ.)		----	400mA	420mA	
Operating Voltage		----	2.2V	3.0V	
Package Style		Coaxial or B82			
Photodiodes		Built-in			

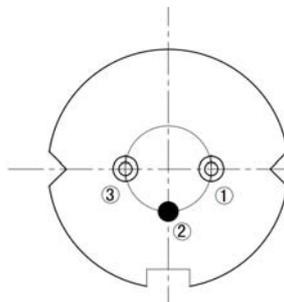

**Coaxial Package View: (Part Number: WSLP-940-100m-4-PD)**

**B82 Package View: (Part Number: WSLP-940-100m-4-B-PD)**

**PIN Bottom View:**


1	LD(-)
2	LD(+)&PD(-)
3	PD(+)



Electrically shorten LD module and store in non-extreme conditions.  
Suggest using the constant current power supply.

