


1470nm 3W Multi-mode Fiber Coupled Laser Module

Features:

- 1470nm
- 15-Pin Package
- Built-in Photodiode
- Built-in TE Cooler
- Built-in Red Aiming Beam

Applications:

- Medical Laser Treatment
- Biological Laser
- Others





WAVESPECTRUM can offer high stability Medical Laser Module with the wavelength range of 375nm ~ 1920nm, the output power upto 50W. We choose the world's top level laser chips in making the lasers to ensure the high quality. And the lasers will undergo severe restricted aging and testing before sending to the customers. For Medical Laser Module, we have integrated several special function to support medical application, such as Photodiode, TE Cooler, Thermistor, Aiming Beam and Fiber Detector. We use the SMA905 Fiber Detachable Connector as standard connector, customer can easily replace the Medical Fiber with it, such as 105um, 200um, 400um, 600um or 800um Fiber. For Aiming Beam, we offer the Red (635nm, 650nm) and Green (520nm) Pilot Laser as optional. Meanwhile, Dual-wavelength, Tri-wavelength, 4-wavelength and Multi-wavelength Medical Laser Module can be customized according to customer needs. The Medical Laser mainly used in Dental Laser, Endovenous Laser Ablation (EVLA), Surgical Operation, PDT, Skin Treatment, Rehabilitation Therapy and Laser Ablation, etc.

WAVESPECTRUM can offer various wavelengths listed as below: 375nm, 405nm, 445nm/450nm, 465nm, 488nm, 505nm/510nm, 515nm/520nm/525nm, 633nm, 635nm/638nm/640nm/642nm, 650nm/658nm/660nm, 670nm, 685nm/690nm, 705nm, 730nm, 755nm/760nm/770nm, 780nm/785nm, 795nm, 800nm/808nm/810nm, 820nm/830nm, 840nm/850nm/860nm, 880nm, 905nm, 915nm, 940nm, 976nm/980nm, 1060nm/1064nm, 1210nm, 1270nm, 1280nm, 1290nm, 1310nm, 1330nm, 1350nm, 1370nm, 1390nm, 1410nm, 1430nm, 1450nm, 1470nm, 1490nm, 1510nm, 1530nm, 1550nm, 1570nm, 1590nm, 1610nm, 1625nm, 1650nm, 1720nm, 1900nm, 1920nm.

WAVESPECTRUM can provide a variety of laser products: single mode laser diode, multimode laser diode, single mode fiber coupling laser modules, polarization maintaining fiber coupled laser modules, multi-mode pigtailed laser modules, fiber detachable laser module, RGB white fiber coupled laser module, medical laser module, turnkey fiber coupled laser system, etc. The main packages for the lasers can be: TO18 | TO5 | C-mount | TO3 | E-mount | H-mount | COS | 2-pin | 4-pin | 9-pin | 14-pin.

WAVESPECTRUM - welcome to inquiry any time!
 Pls visit our Website for more info.: <http://www.wavespectrum-laser.com.cn/index.html>

MORE CHOICES, MORE IDEAS

												
Laser Diode		Fiber Coupled Laser Module		Fiber Receptacle LD		Laser System		RGB Pigtailed White Laser		Medical Laser Module		
375nm	405nm	445nm	465nm	488nm	505nm	520nm	525nm	635nm	650nm	660nm	670nm	680nm
685nm	760nm	785nm	790nm	808nm	830nm	850nm	860nm	880nm	905nm	915nm	940nm	980nm
1064nm	1210nm	1270nm	1280nm	1290nm	1310nm	1330nm	1350nm	1370nm	1390nm	1410nm	1430nm	1450nm
1470nm	1490nm	1510nm	1530nm	1550nm	1570nm	1590nm	1610nm	1625nm	1650nm	1720nm	1900nm	1920nm
 <div style="display: inline-block; vertical-align: middle;"> <p>WAVESPECTRUM LASER GROUP LIMITED</p> <p>Email: sales@wavespectrum-laser.com.cn</p> <p>Tel.: +86 22 8793 1118</p> <p>Web.: http://en.wavespectrum-laser.com.cn</p> </div>												



1470nm 3W Multi-mode Fiber Coupled Laser Module

Part Number		WSLX-1470-003-200M-H15-T-PD-A		
PARAMETER		SYMBOL	VALUE	UNIT OF MEASURE
Reverse Voltage		V_r	2.0	V
Operating Temperature		T_{op}	+10~+30	°C
Storage Temperature		T_{stg}	-20~+80	°C
Lead Soldering Temperature (10 sec.)		T_{is}	260	°C
Typical Specification (@25°C)		Min.	Typical Value	Max.
Optical Specifications	Center Wavelength	1470nm+/-30nm		
	Output Power	----	3W	----
	Spectral Width(FWHM)	----	7.0nm	----
	Wavelength Temp. Coefficient	0.7nm/°C		
	Laser Type	FP		
Fiber Specifications	Fiber Core	200um (105um/400um Optional)		
	N.A.	0.22		
	Fiber Type	Multi-mode Fiber		
	Fiber Length	>80cm		
	Fiber Connector	FC/SMA905/SC/ST		
Electrical Specifications	Threshold Current	----	0.8A	1.5A
	Operating Current	----	11.0A	12.0A
	Operating Voltage	----	1.7V	2.2V
Photodiode Specifications	Photodiode	Built-in		
	PD Current	----	0.1mA	----
	PD Reverse Voltage (Max.)	30V		
TE Cooler Specifications	TE Cooler	Built-in		
	TEC Current (Max.)	6A		
	TEC Voltage (Max.)	9.8V		
Thermistor	Thermistor (@25°C)	10KΩ		
Aiming Beam Specifications	Aiming Beam	Built-in		
	Standard	>2mW@(650nm±20nm) (Red)		
	Customized	>2mW@520nm (Green) Optional		
Other Specifications	Package	15-Pin		
	Recommended Operating Temp.	25°C		




1470nm 3W Multi-mode Fiber Coupled Laser Module

Product Package View:

15-Pin Package View:

(Part Number: WSLX-1470-003-200M-H15-T-PD-A)

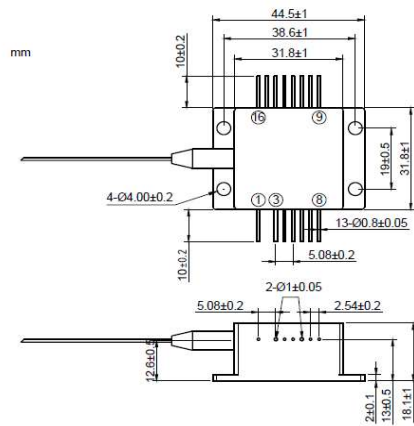

PIN	FUNCTION	PIN	FUNCTION
1	CASE	9	TEC(-)
2	-	10	None
3	LD(+)	11	None
4	Thermistor (10K)	12	None
5	Thermistor (10K)	13	None
6	LD(-)	14	Aiming Beam LD (+); [DC3V-5V]
7	PD(P)	15	Aiming Beam LD (-); [GND]
8	PD(N)	16	TEC(+)

